


# TECHNICAL DATA SHEET

CODE:	HR3019VM
DESCRIPTION:	HOSE REEL MANUAL REWIND VEHICLE MOUNT 30M
CATEGORY:	BUSHFIRE / FORESTRY EQUIPMENT
REVISION DATE:	18 JANUARY 2022

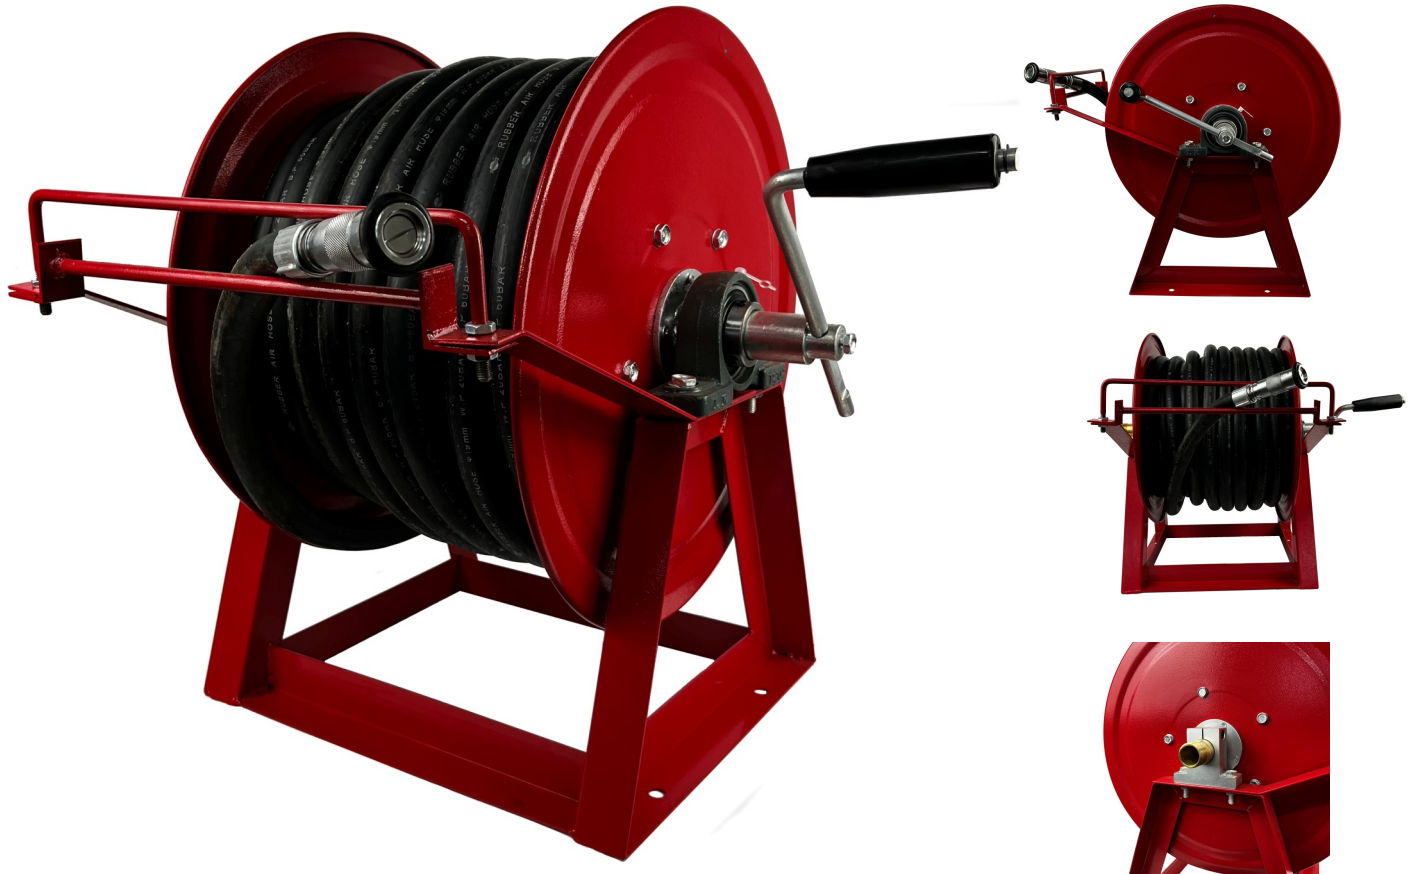

## PRODUCT DESCRIPTION:

Designed to be mounted on light trucks or trailers, this hose reel incorporates high quality, durable core components in an economical package suitable for rural land owners and community fire trailers. The hose reel is easily deployed and operated by a single person.

Designed to be used with portable fire fighting pumps, the hose reel has a maximum working pressure of 20bar (2000 kPa) and is easily connected with a 25mm (1") BSP male brass inlet fitting.

Fitted with a 30m long premium rubber hose to resist kinking and a plated brass jet, spray, fog nozzle this unit is fully pressure tested once assembled.




**AUSTRALIA WIDE FIRE SUPPLIES ABN 80393915621 UNIT 5/54 PENDLEBURY RD CARDIFF NSW 2285**

**P: (+61) 02 49540333 E: [sales@awfs.com.au](mailto:sales@awfs.com.au) W: [www.awfs.com.au](http://www.awfs.com.au)**


# TECHNICAL DATA SHEET

## PRODUCT SPECIFICATIONS:

- **Body Construction:** Powder coated 1.5mm pressed steel drum and 2mm x 40mm steel angle frame
- **Inlet Fitting:** Brass 25mm (1") BSP male sealed swivel mechanism with internal gooseneck connection
- **Rewind Handle:** Galvanised Steel, adjustable and foldable with swivel handle sleeve
- **Rewind Shaft Bearing:** Fitted with grease nipple
- **Hose:** 30m long 19mm ID black rubber WP 20bar (2000 kPa) Burst Pressure 60bar (6000 kPa)
- **Nozzle:** Plated brass jet, spray, fog twist type operation
- **Mounting:** Designed for horizontal mounting only. 4 x pre-drilled 12mm holes in base
- **Manufacture Test Pressure:** 30bar (3000 kPa)

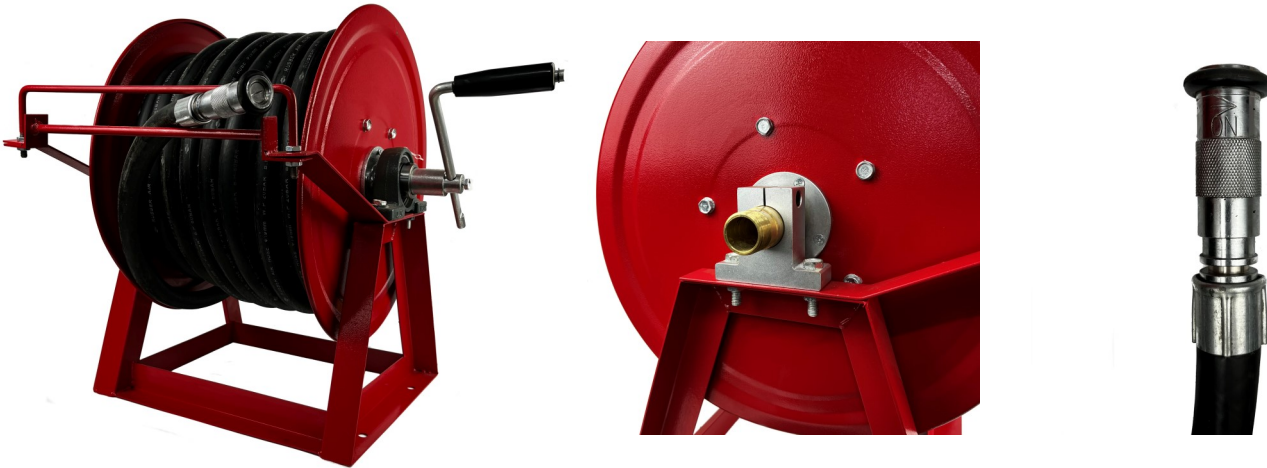

## PRODUCT DIMENSIONS:

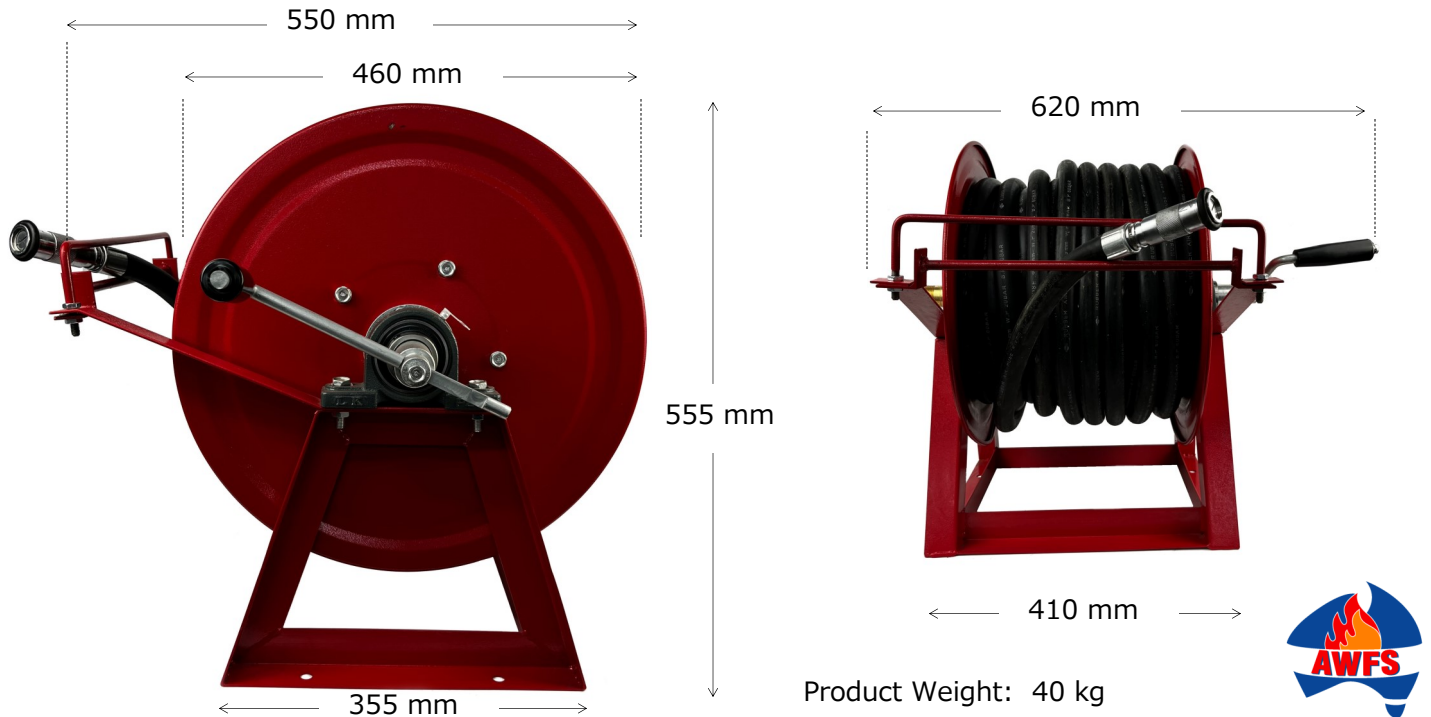

AUSTRALIA WIDE FIRE SUPPLIES ABN 80393915621 UNIT 5/54 PENDLEBURY RD CARDIFF NSW 2285

P:(+61) 02 49540333 E: sales@awfs.com.au W: www.awfs.com.au