




# AUSTRALIA WIDE FIRE SUPPLIES

ABN 80 393 915 621

PO Box 25  
Cardiff NSW 2285  
Unit 5/54 Pendlebury Rd  
Cardiff NSW 2285  
Phone. (+61) 02 4954 0333  
Fax. (+61) 02 4956 6195  
Email. sales@awfs.com.au  
Website. www.awfs.com.au

## FOAM MAKING BRANCHPIPE 1-3-6%

Part No: BFM

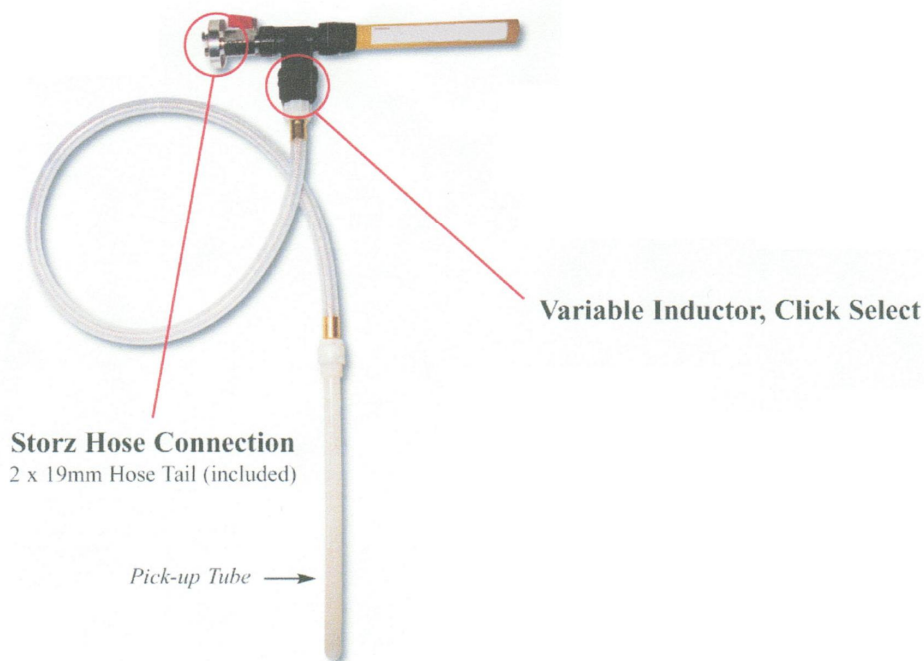

### APPLICATIONS

The 1-3-6% Foam Making Branchpipe was developed to augment the fire fighting capabilities of a standard fire hose reel. Until now, standard fire hose reels have only been suitable for fighting A Class fire (i.e. solids, such as wood, paper and textiles).

Now with the advent of the 1-3-6% Foam Making Branchpipe, your hose reel(s) can instantly be converted to a foam making station, to improve your A Class fire fighting capability and for B Class Fire such as petrol, oils, paints and solvents.

### OPERATION

To operate the 1-3-6% Foam Making Branchpipe, insert pick-up tube into a container of foam solution and turn on water supply. When water flows through the Venturi nozzle, solution is automatically induced. When the foam solution is mixed with air, a continuous stream of aerated foam is produced.

### APPLICATION

The hose reel branchpipe is suitable for use on 'A' and 'B' Class fires.

A – Ordinary combustibles. (solids: such as wood, paper and textiles).

B – Flammable liquids. (petrol, paint and solvents).

The unit is particularly suited for rapid control of fire in high risk industries such as petrochemical, transport and mining.

### DESIGN

The unique 1-3-6% Foam Making Branchpipe employs a sophisticated Venturi system that ensures consistent induction of foam solution through a range of water supply pressure.

The unit is fitted with strainers on the foam and water inlets to prevent obstruction by foreign matter.

### CONSTRUCTION

The unit is constructed from selected materials to ensure long term durability and resistance to corrosion.

Manufactured from:

Fibre Glass Reinforced Nylon.

Pick-up Line Assembly: PVC hose.

**PICK UP TUBE OPTION:** Order either **Rigid Spike** OR **Pail Screw top** for attaching to 20lt drums

In line with our policy of continuous improvement we reserve the right to amend any specification without notice.